

Dovre 2620SC/B

Wood-burning fireplace insert with two fans: flue and convection-air connections on top

01 FRONT VIEW

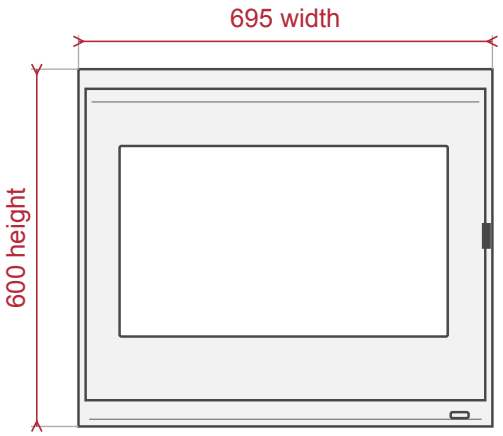


02 SIDE VIEW

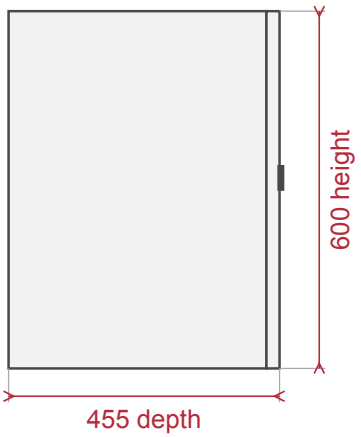

Back at the left. Front at the right.

03 TOP VIEW WITH THE CONNECTIONS

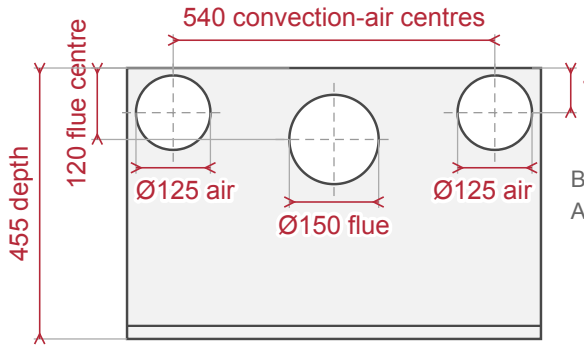

Back at the top. Front at the bottom.
A convection-air connection at each side of the flue.

PLANNING NOTES

These are the insert's own sizes, not a building opening. Ask us for the opening size before you build.
Have an independent installer plan the opening, the clearances and the flue from the manual.
Two built-in fans give 180 m³/h of warm air. A thermo switch and a separate speed controller run them.
The fans need a 230 V, 50 Hz electrical connection (0.5 A). Have it wired by a qualified electrician.
It burns wood only, with logs up to 50 cm long.
The insert weighs 160 kg. The door can open from either side.
Flue pipes and cowl, warm-air ducts, the electrical connection and installation are not included.
Send us a photo, your room measurements and roof details for a product and flue quote.