

Dovre 2120

Built-in wood-burning fireplace with two fans: flue and convection-air connections on top

01 FRONT VIEW

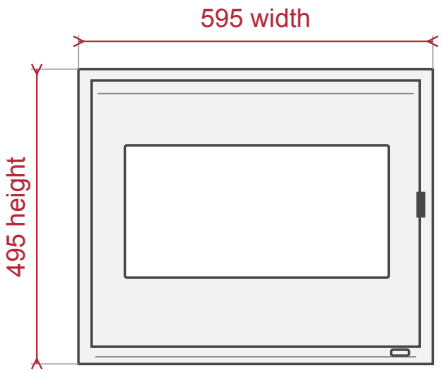


02 SIDE VIEW

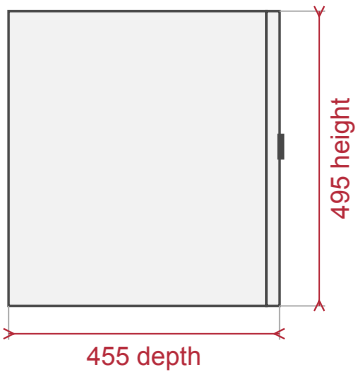

Back at the left. Front at the right.

03 TOP VIEW WITH THE CONNECTIONS

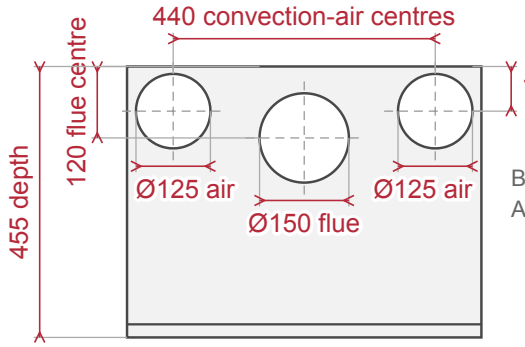

Back at the top. Front at the bottom.
A convection-air connection at each side of the flue.

PLANNING NOTES

These are the insert's own sizes, not a building opening. Ask us for the opening size before you build.
Have an independent installer set the opening, the flue, the ducts and the clearances from the manual.
Two built-in fans give 140 m³/h of warm air. A thermo switch controls them and a separate controller sets the speed.
The fans need a 230 V, 50 Hz electrical connection (0.5 A).
Plan a power supply near the fireplace with a qualified electrician.
It burns wood only, with logs up to 40 cm long.
The insert weighs 130 kg. The door can open from either side.
Flue pipes and cowl, convection ducting, the electrical connection and installation are not included.
Send us a photo, your room measurements and roof details for a product and flue quote.