
ALL SIZES IN MILLIMETRES

HomeFires R0801 Freestanding Fireplace


Closed-combustion stove for wood or anthracite: steel body, cast-iron door, top or rear flue outlet

01 FRONT VIEW

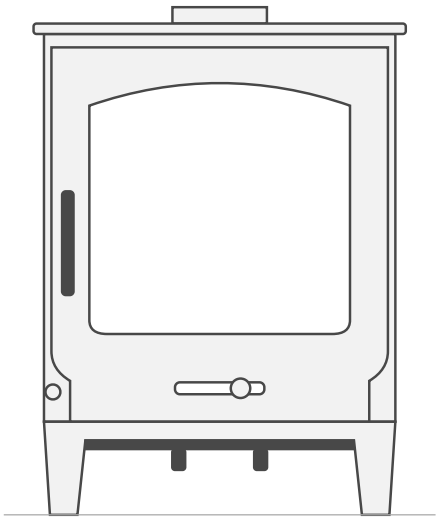


Top outlet shown. A rear outlet is the other option.

02 SIDE VIEW

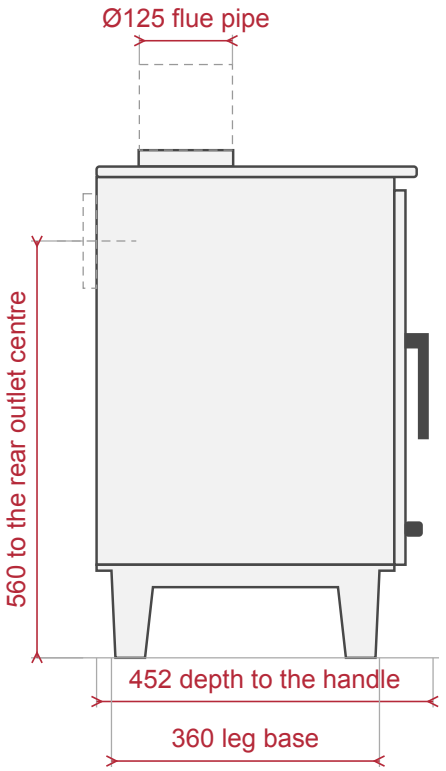


Back at the left. Front at the right.
The dashed pipe is not included.

03 TOP VIEW

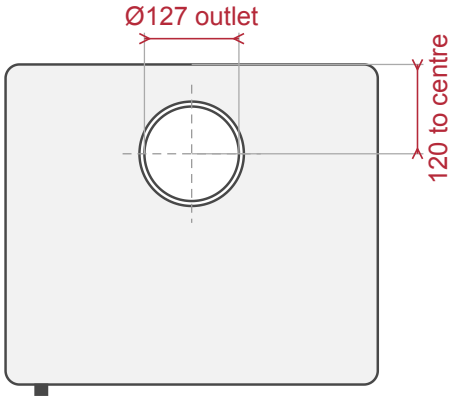

Back at the top. Front at the bottom.

04 DOOR WINDOW




BRAAI CULTURE


ALL SIZES IN MILLIMETRES

HomeFires R0801 Freestanding Fireplace

05 COMBUSTIBLE WALLS, TOP VIEW (SMALLER SCALE)

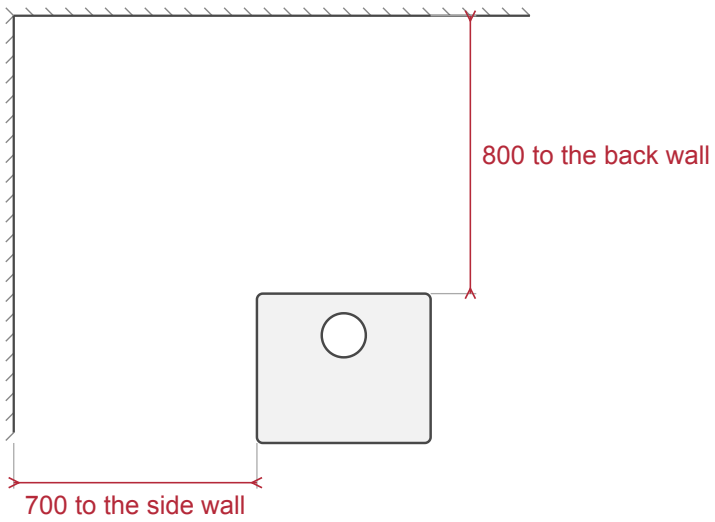

06 IN A RECESS, TOP VIEW (SMALLER SCALE)

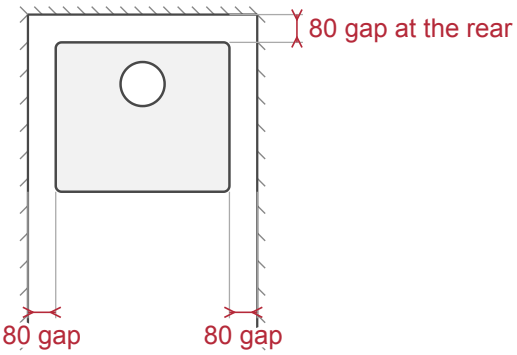

Non-combustible walls. Front at the bottom.

PLANNING NOTES

These are product sizes. Ask us to confirm the main width, height and depth before you plan a tight space.
A closed-combustion stove for wood logs or anthracite.
8 kW nominal output on wood and 10 kW maximum heat output, with 80.5% efficiency on wood at nominal output.
Connect the flue on top or at the rear. Flue pipes are Ø125 and sold separately, as are the cowl and the hearth.
Keep 800 to a combustible back wall and 700 to a combustible side wall.
In a recess with solid non-combustible walls, we recommend an 80 gap at the sides and the rear.
Stand it on a non-combustible hearth at least 12 thick. Your installer checks the actual unit and your room.
Included: the fireplace with its cast-iron door and ash drawer. Installation is not included.