
ALL SIZES IN MILLIMETRES

HomeFires R0802 Freestanding Fireplace


Tall closed-combustion stove for wood or anthracite: steel body, cast-iron door, log store below

01 FRONT VIEW

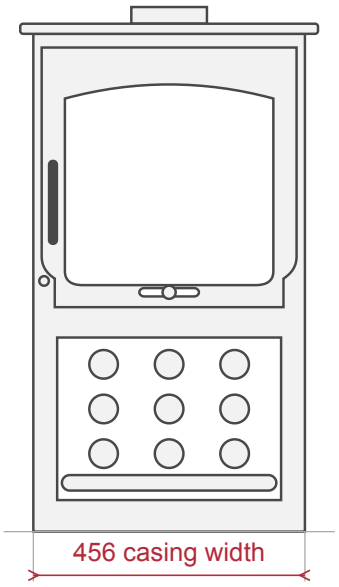


Top outlet shown. A rear outlet is the other option.

02 SIDE VIEW

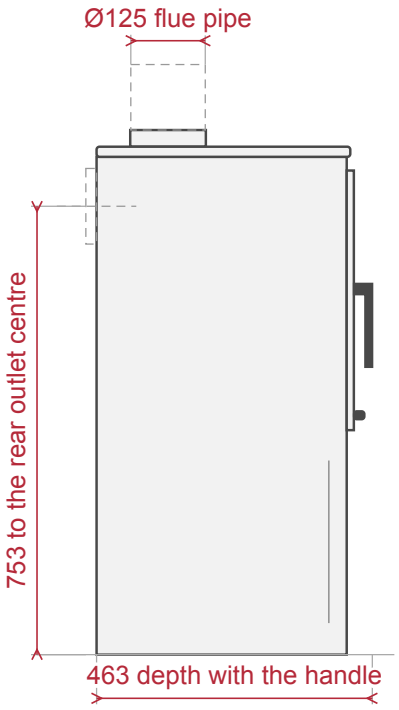


Back at the left. Front at the right.
The dashed pipe is not included.

03 TOP VIEW

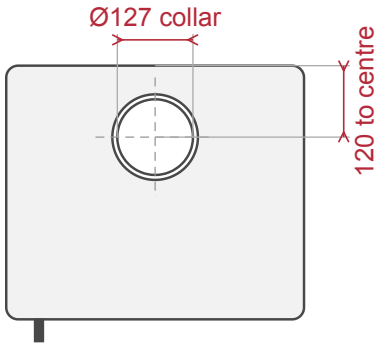

Back at the top. Front at the bottom.

04 DOOR WINDOW




BRAAI CULTURE


ALL SIZES IN MILLIMETRES

HomeFires R0802 Freestanding Fireplace

05 COMBUSTIBLE WALLS, TOP VIEW (SMALLER SCALE)

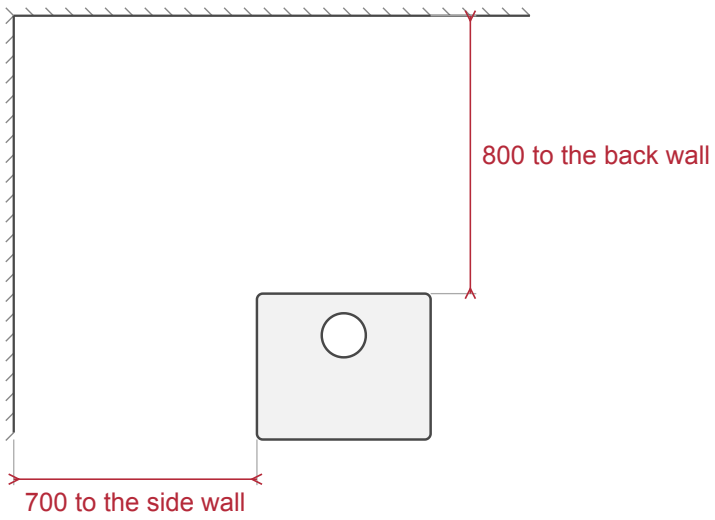

06 IN A RECESS, TOP VIEW (SMALLER SCALE)

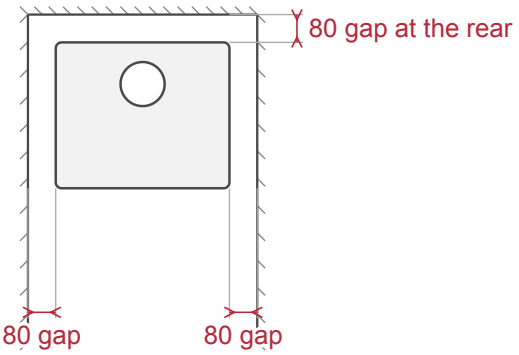

Non-combustible walls. Front at the bottom.

PLANNING NOTES

These are product sizes. Ask us to confirm the full width, height and depth before you plan a tight space.
A closed-combustion stove for wood logs or anthracite. Never burn household or bituminous coal or petroleum coke.
8 kW nominal output on wood and 10 kW maximum heat output, with 80.5% efficiency on wood at nominal output.
Connect the flue on top or at the rear, on a nominal Ø125 flue pipe. There is no outside air connection.
Keep 800 to a combustible back wall and 700 to a combustible side wall.
In a recess with non-combustible walls, we recommend an 80 gap at the sides and the rear.
Stand it on a non-combustible hearth at least 12 thick. Your installer checks the actual unit and your room.
Included: the wood storage stand, the cast-iron door, a riddling grate, an ash pan, an ash drawer and a tool.
Flue pipes and accessories, the hearth and installation are not included.
Three-year limited warranty on the main body when registered within 30 days; otherwise 12 months.