
ALL SIZES IN MILLIMETRES


WIKING S1 Slow Combustion Fireplace

Full cast-iron closed-combustion freestanding fireplace

01 FRONT VIEW

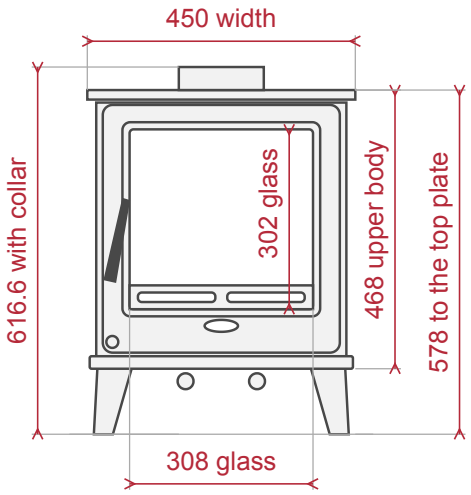


02 SIDE VIEW

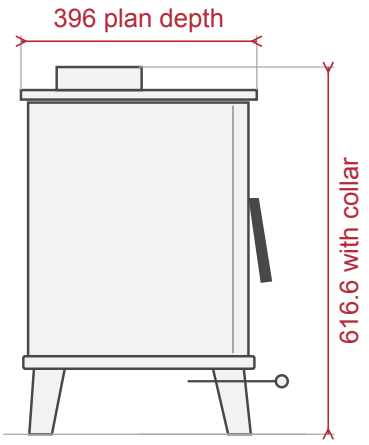


Front at the right. The handle and the rods stand out past this depth.

03 TOP VIEW

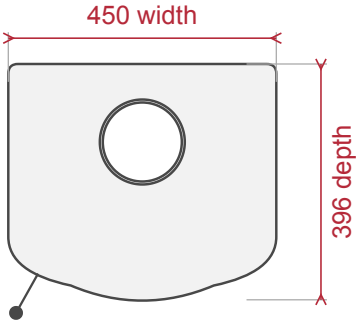

Back at the top. Front at the bottom.

04 FLUE OUTLET (LARGER SCALE)




Flue pipe: 125 nominal.
Top or rear connection.

BRAAI CULTURE

ALL SIZES IN MILLIMETRES

WIKING S1 Slow Combustion Fireplace


05 IN A RECESS (SMALLER SCALE)

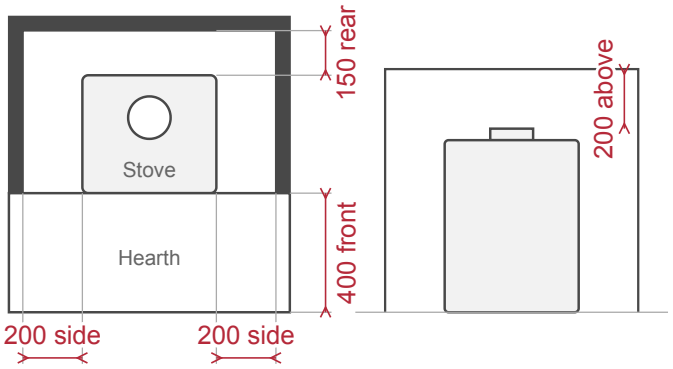

Plan. Front at the bottom.

Front view.

06 CLEARANCES (SMALLER SCALE)

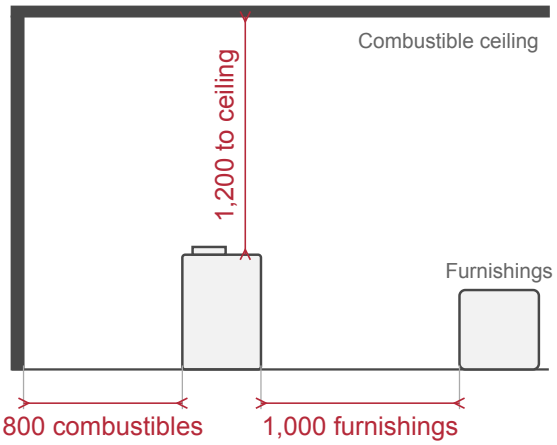

Side view. Front at the right.

PLANNING NOTES

The 616.6 height includes the collar on top. The 578 height stops at the top plate.
The 396 depth runs from the back to the curved front. The door handle stands out past it.
Flue pipe: 125, fitted with 1 m of 6 mm rope, with no appliance adaptor.
A constructional hearth must be at least 125 thick, including any surface finish.
A sheet hearth may be 12 thick only outside a recess and subject to testing. Read the manual before you plan it.
Do not connect the stove to a shared chimney or flue. Do not fit an extractor fan in the same room.
Net weight 92 kg: check that the floor can carry it.
Included: the riddling grate, the ashpan, the door and its handle.
Logs: about 250 long at most, so that they lay flat over the embers. Split logs more than 6 cm across.
Use well-seasoned wood with a moisture content below 20%.