
ALL SIZES IN MILLIMETRES


FLAMM 560 on Legs

Freestanding wood fireplace: closed combustion, with one wide glass door

01 FRONT VIEW

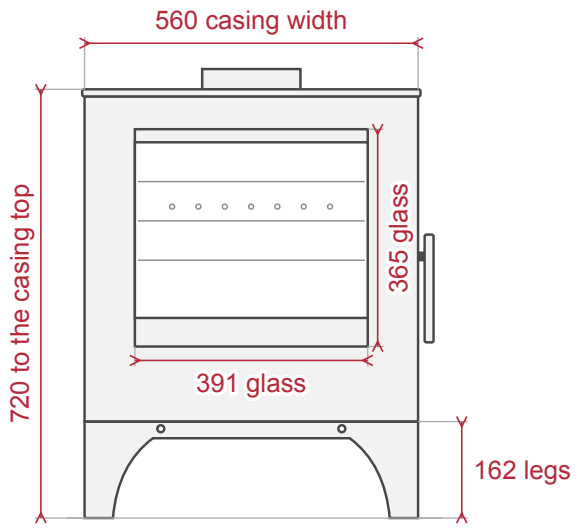


02 SIDE VIEW

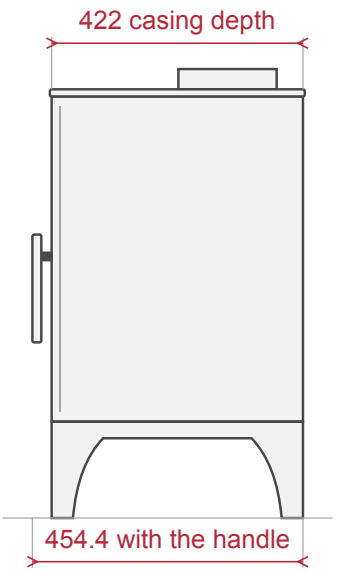


Front at the left. Back at the right.

03 TOP VIEW

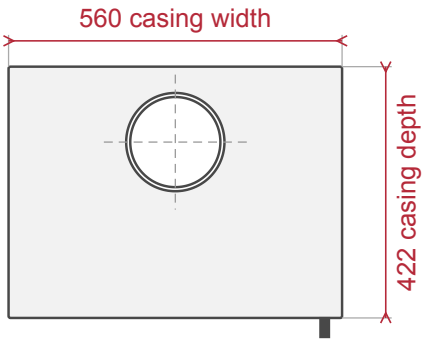

Back at the top. Front at the bottom.

04 FLUE OUTLET (LARGER SCALE)




For a nominal 150 flue pipe.


ALL SIZES IN MILLIMETRES

FLAMM 560 on Legs

05 COMBUSTIBLE WALLS, TOP VIEW (SMALLER SCALE)

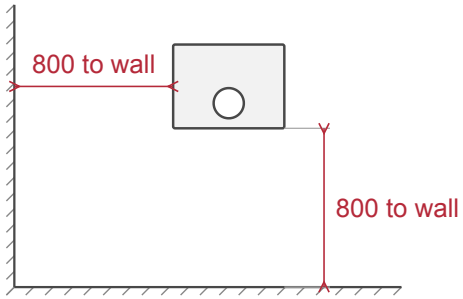


06 FLOOR PROTECTOR, TOP VIEW (SMALLER SCALE)

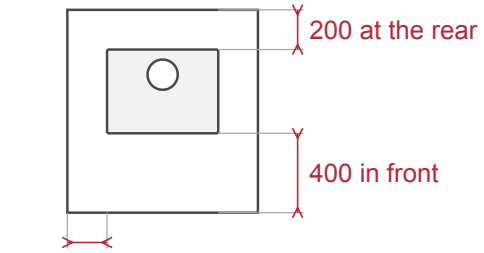


Front at the bottom.

07 CEILING AND FURNISHINGS (SMALLER SCALE)

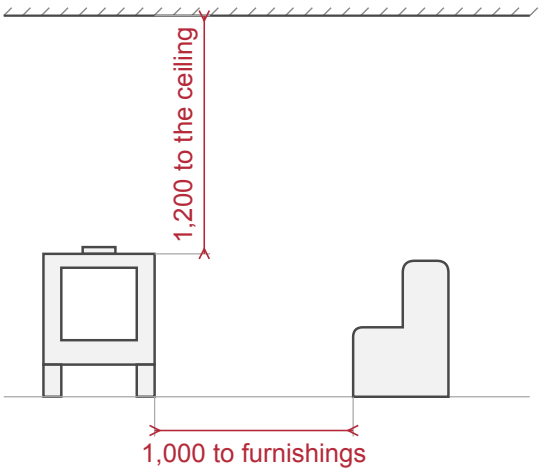

08 FLUE ABOVE THE ROOF (SMALLER SCALE)

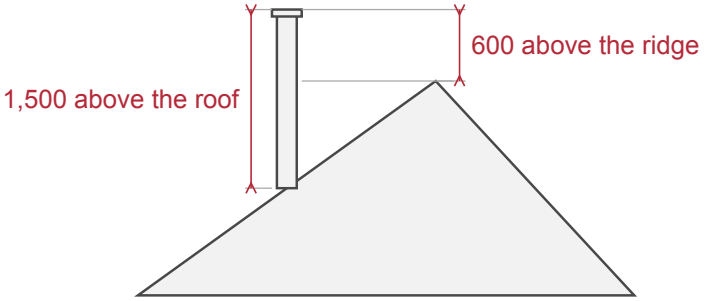

PLANNING NOTES

These are product sizes. Have an independent installer check the hearth, the clearances and the flue for your house.
The flue collar stands on top of the 720. Ask us to confirm the total height before a tight fit.
The constructional hearth must be at least 125 thick. Where a firewall is needed, it must be at least 100 thick.
In a recess, leave a free air gap of at least 200 at the sides, 200 above and 50 behind.
Avoid horizontal flue runs: keep any horizontal run to 400 at most, followed by at least 2,500 of vertical flue.
A flue of 4,500 from the stove to the top could be enough, depending on your site.
Flue pipes, accessories and installation are not included. Send us a photo and measurements for a flue quote.