
ALL SIZES IN MILLIMETRES


FLAMM 950 Double Sided Built-in

Built-in wood fireplace: closed combustion, double sided, a trim plate on each face

01 FRONT VIEW, EITHER FACE

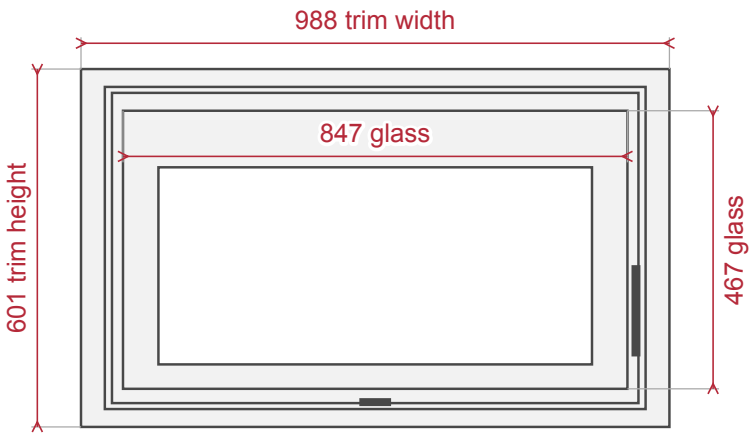


02 SIDE VIEW

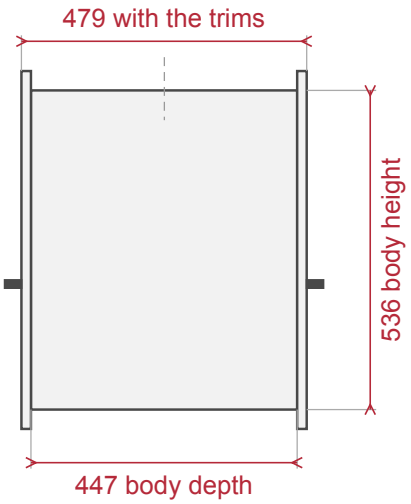


Glass doors at the left and the right.
Dashed: the outlet centre.

03 TOP VIEW

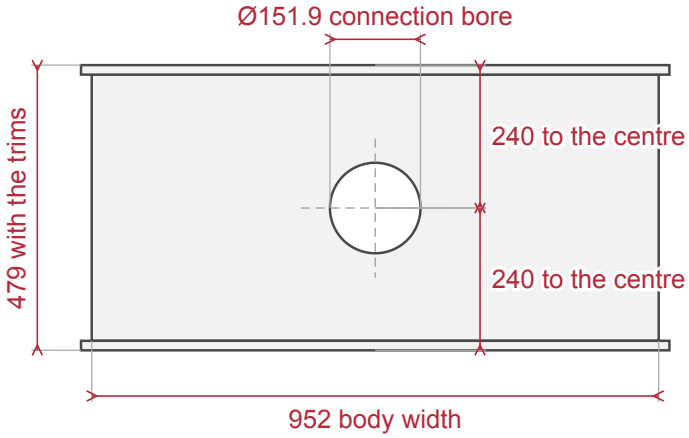

Glass doors at the top and the bottom.
Top flue connection for a Ø150 flue pipe.

04 AIR SPACE IN THE RECESS (SMALLER SCALE)

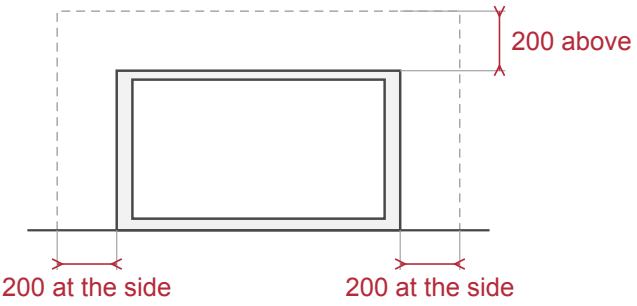


Front view, trim off. Dashed: the recess.

BRAAI CULTURE

ALL SIZES IN MILLIMETRES


FLAMM 950 Double Sided Built-in

05 CEILING AND SIDES (SMALLER SCALE)

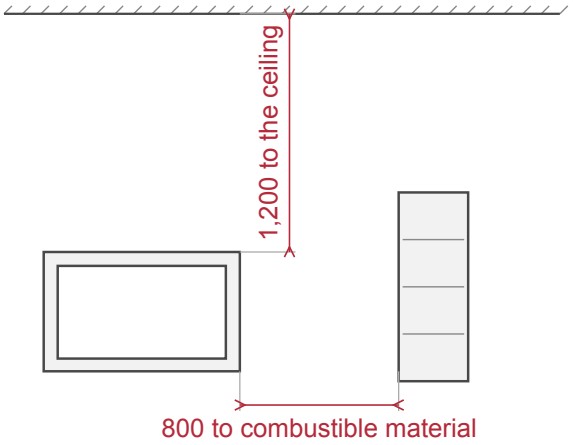

Front view. Grey at the right: a combustible shelf.

06 HEARTH AND FURNISHINGS (SMALLER SCALE)

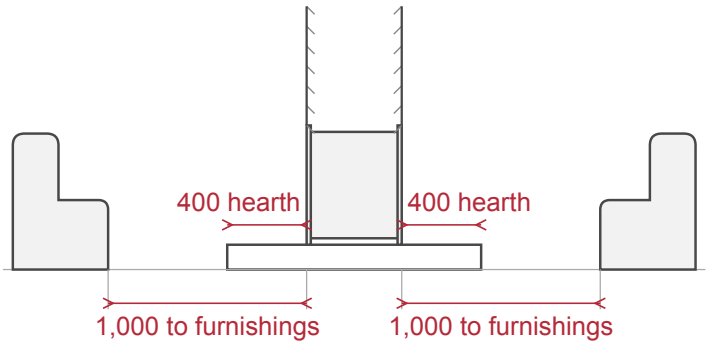

Side view. White: the hearth at both doors.

PLANNING NOTES

These are product sizes, not an opening size. Allow for the recess, airflow, hearth and flue route.
Have an accredited installer check both sides of the wall before construction.
Your installer confirms the opening, the support and the access for this double-sided installation.
The fireplace weighs 180 kg.
Included: trim plates for both sides, the insulated outer casing, two doors with handles and an ash pan.
The flue kit, the hearth and the surround are not included.
Flue kits are quoted to suit the building. The flue must have its own chimney route.
External sections need insulated twin-wall pipe.
Heat output: 13 kW nominal, 16 kW maximum. Efficiency: 80 %. The firebox is fully welded 5 mm steel.
Burn dry, seasoned hardwood. Logs about 350 long or less; split logs thicker than 80.
Register the fireplace within 30 days of purchase for the five-year limited main-body warranty.