
ALL SIZES IN MILLIMETRES


FLAMM CUTE 985 on Log Base

Freestanding wood fireplace: closed combustion, wide glass over a log base

01 FRONT VIEW

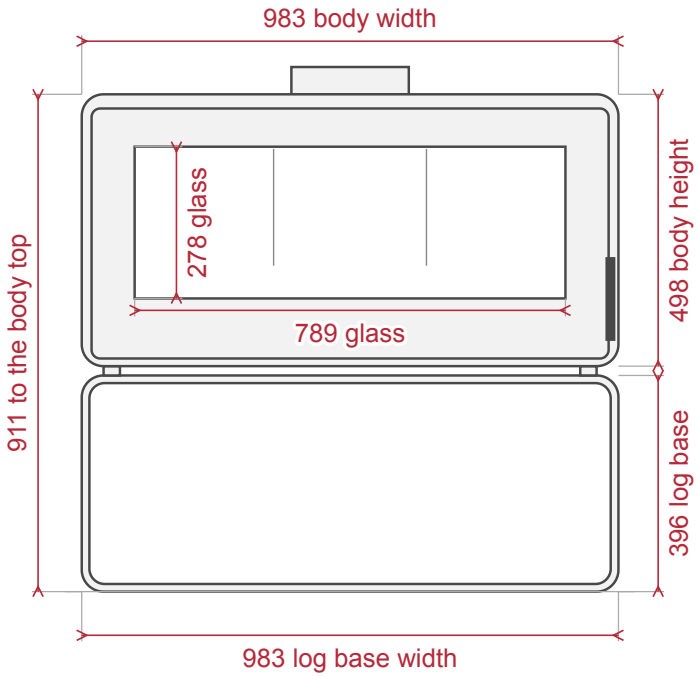


02 SIDE VIEW

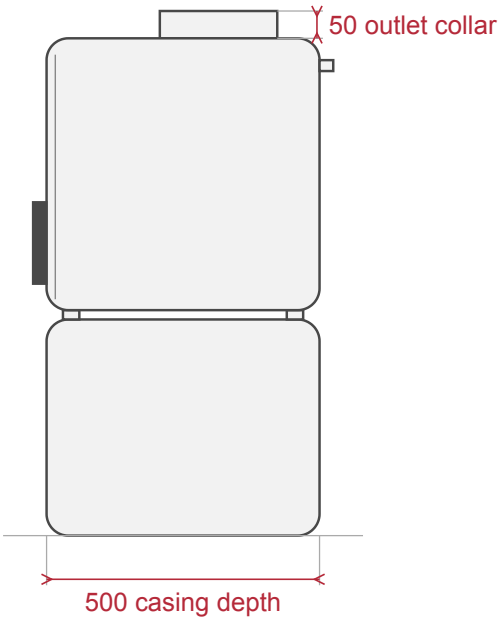


Front at the left. Back at the right.

03 TOP VIEW

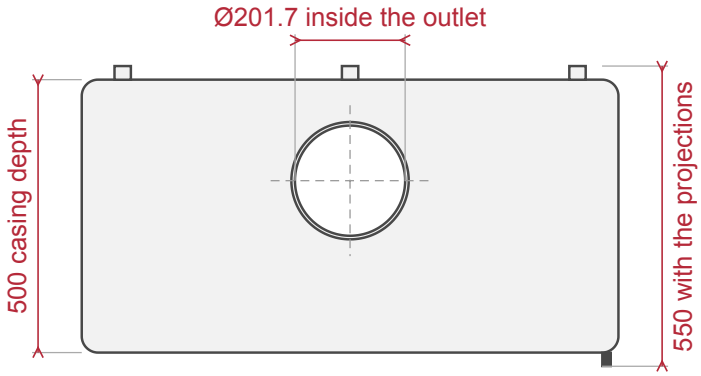

Back at the top. Front at the bottom.
For a nominal 200 flue pipe.

04 COMBUSTIBLE WALLS, TOP VIEW (SMALLER SCALE)

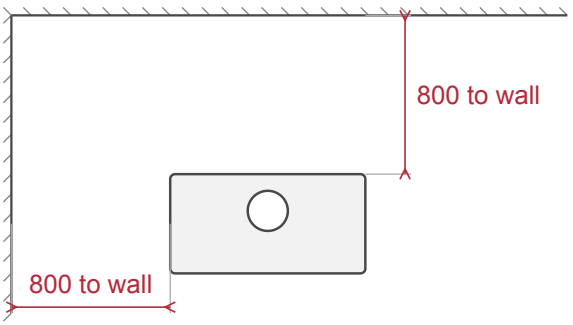


Back at the top. Front at the bottom.

BRAAI CULTURE

ALL SIZES IN MILLIMETRES


FLAMM CUTE 985 on Log Base

05 FLOOR PROTECTOR, TOP VIEW (SMALLER SCALE)

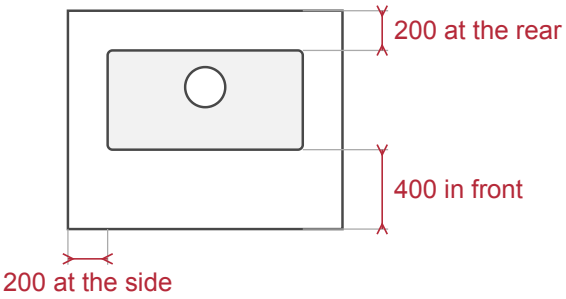

Front at the bottom.

06 CEILING AND FURNISHINGS (SMALLER SCALE)

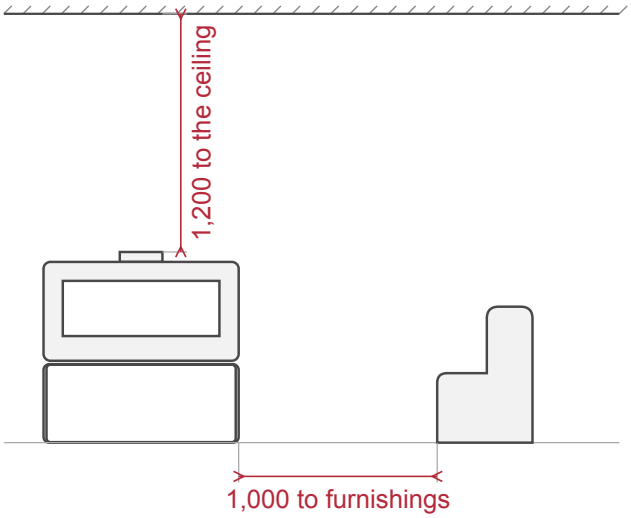

PLANNING NOTES

These are product sizes. Have an independent installer confirm the hearth, the flue route and the clearances.
The 911 runs to the top of the body. The 50 outlet collar and the flue go above that.
The fireplace weighs 242 kg, so have your installer check that the floor can carry it.
In a suitable recess, leave a free air gap of 200 at the sides and top and 50 at the rear.
That gap is for airflow only and does not replace the 800 to combustible walls.
The log base and the ash pan are included.
Chimney flue pipes, accessories and installation are not included. Send us a photo and measurements for a flue quote.