Chad-O-Chef 1200 Drop-In Fireplace

Drop-in flueless gas fireplace: burner in a stone tray, controls at the right

01 FRONT VIEW

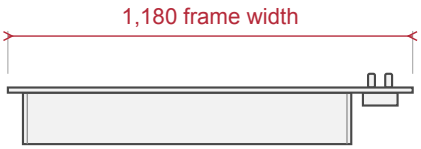

02 SIDE VIEW



Front at the right.
The controls stand above the frame.

03 TOP VIEW

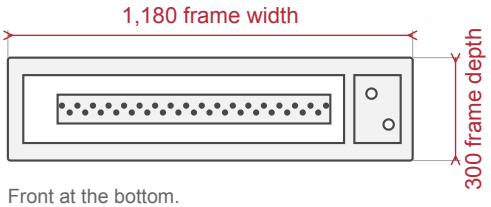

Front at the bottom.
Controls at the right.

04 CUT-OUT IN THE HOUSING

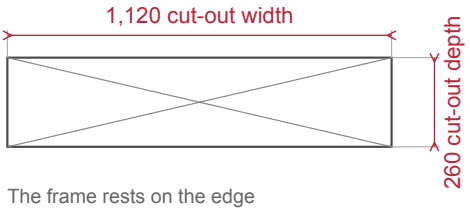

The frame rests on the edge of the cut-out.

05 VENT COVER (TWO SUPPLIED)



Two vent covers are supplied.
The housing must not burn. It needs two brick-sized ventilation holes below the unit; the covers finish them.

06 CLEARANCES, FRONT (SMALLER SCALE)

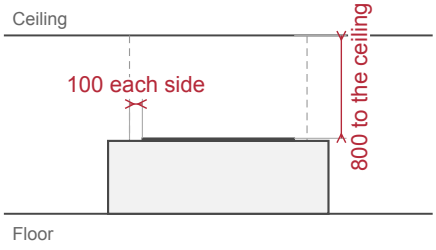

07 CLEARANCES, SIDE (SMALLER SCALE)

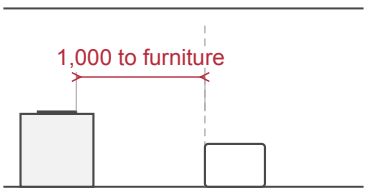

Front at the right.

PLANNING NOTES

Keep 500 from curtains and fabric at the sides.
Keep 100 to the floor, carpet included.
Do not install it within 500 of an air vent.
A heat-resistant masonry shelf may be fitted 800 above the fireplace.
Never put a TV or other electrical equipment above it, and nothing that can burn.
Without permanent ventilation the room must be at least 210 m³.
For a smaller room, your gas installer must plan permanent ventilation.
Do not install it in a bedroom, bathroom, toilet or sauna.
A gas installer registered with SAQCC Gas must install it.
Gas connection: Ø8 compression inlet.