

Chad-O-Chef Classic Fireplace 800

Built-in flueless gas fireplace, set into a wall opening


01 FRONT VIEW

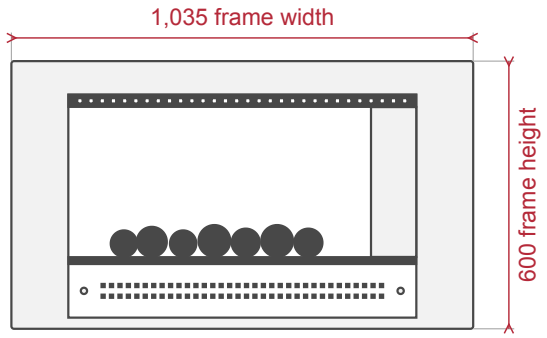

02 REAR VIEW

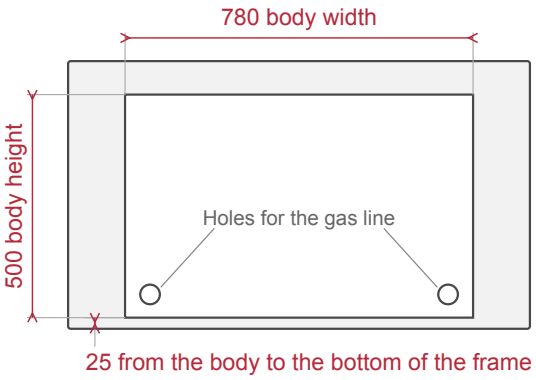


03 TOP VIEW

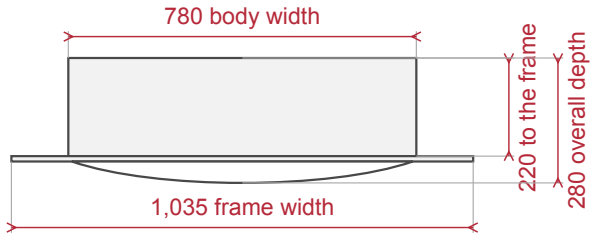


Front at the bottom. Curved cover at the front.

04 WALL OPENING

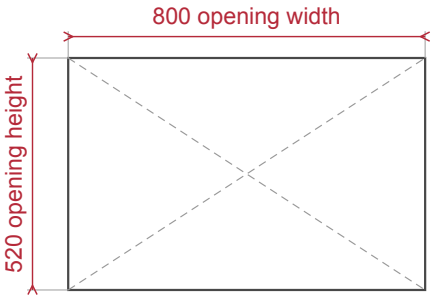


We recommend an opening depth of 250 to 300.

05 CLEARANCES, FRONT (SMALLER SCALE)

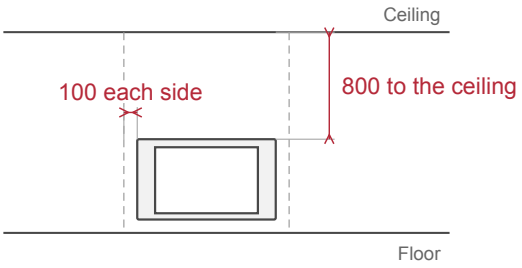

06 CLEARANCES, SIDE (SMALLER SCALE)

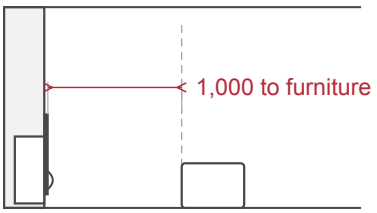

Wall at the left. Front at the right.

PLANNING NOTES

Keep 500 from curtains and fabric at the sides.
Keep 100 to the floor, carpet included.
Without permanent ventilation the room must be at least 160 m³.
A smaller room needs permanent ventilation, planned by your gas installer.
We suggest a room of 399 m³ (108 m²) at most, subject to room conditions.
A gas installer registered with SAQCC Gas for your gas type must install it.
A load-bearing lintel must support the wall above the opening.
Your gas installer checks the actual unit, the opening and the clearances.