

Chad-O-Chef Picture Fireplace 700

Flueless gas fireplace in a wide frame, recessed into a wall opening


01 FRONT VIEW

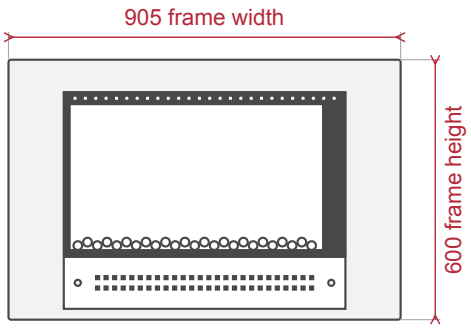

02 REAR VIEW

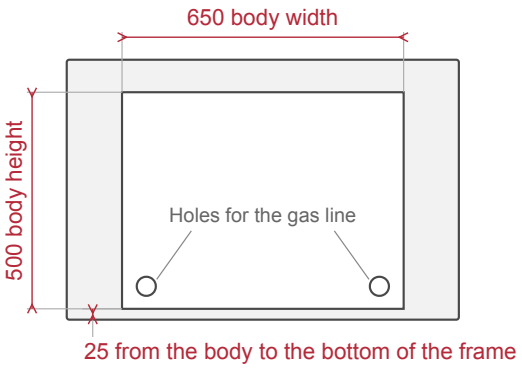


03 TOP VIEW

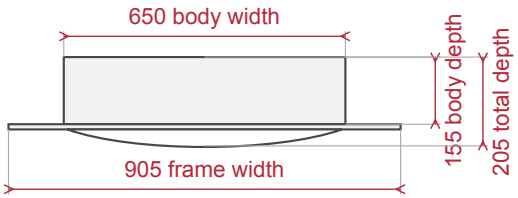


Front at the bottom. Bowed cover at the front.

04 WALL OPENING

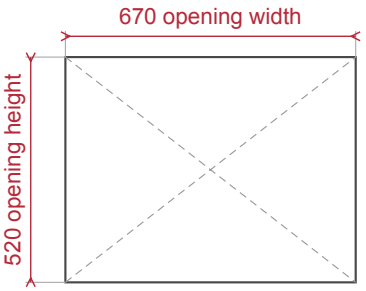


We recommend an opening depth of 160 to 200.

05 CLEARANCES, FRONT (SMALLER SCALE)

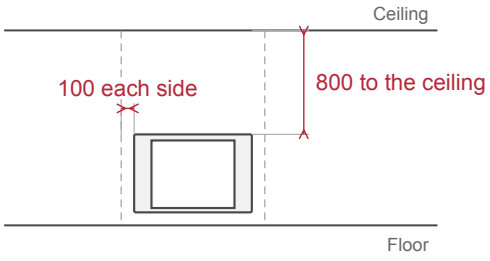

06 CLEARANCES, SIDE (SMALLER SCALE)

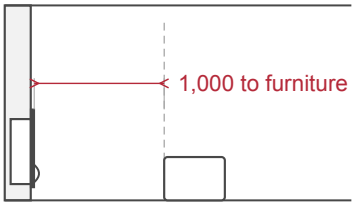

Wall at the left. Front at the right.

PLANNING NOTES

Keep 500 from curtains and fabric at the sides.
Keep 100 to the floor, carpet included.
A heat-resistant masonry shelf may sit 500 above it.
Without permanent ventilation the room must be at least 105 m³.
A smaller room needs permanent ventilation. Your gas installer calculates it.
We suggest a room of 233 m³ (72 m²) at most. The right size depends on insulation, materials and climate.
Do not install it in a bedroom, bathroom, toilet or sauna.
It may also hang on the wall. Your installer confirms the fixings for your wall.
A SAQCC Gas registered installer for your gas type must install it.
Your gas installer checks the actual unit, the opening and the clearances.