

Chad-O-Chef Contemporary Fireplace 1000

Built-in flueless gas fireplace for indoors, set into a wall opening


01 FRONT VIEW

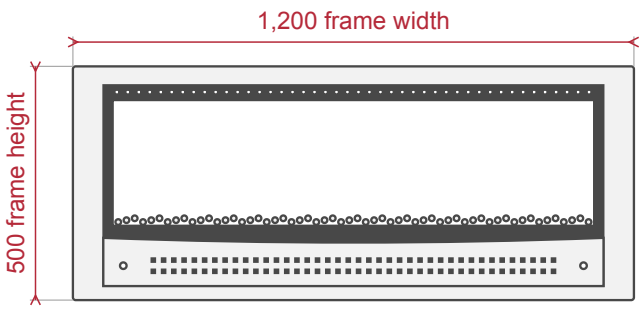

02 REAR VIEW

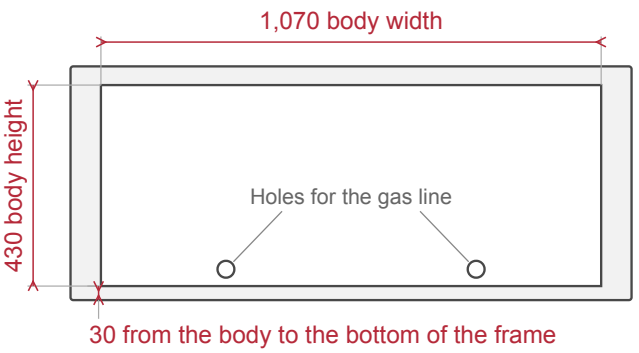


03 TOP VIEW

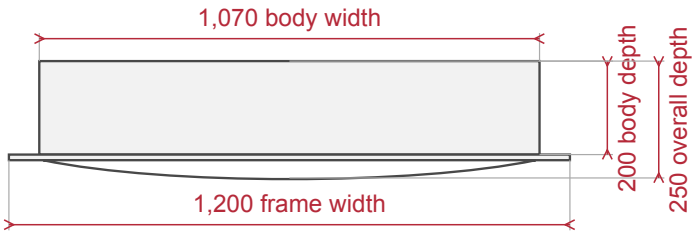


Front at the bottom. Curved cover at the front.

04 WALL OPENING

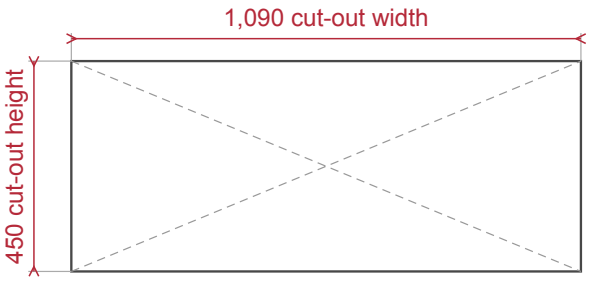


We recommend an opening depth of 200 to 250.

05 CLEARANCES, FRONT (SMALLER SCALE)

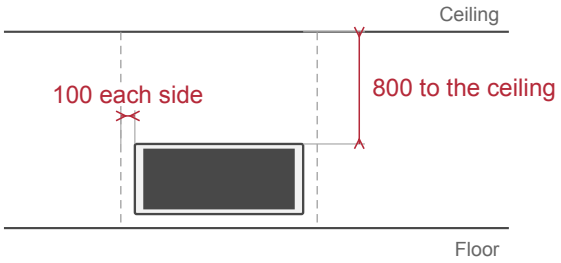

06 CLEARANCES, SIDE (SMALLER SCALE)

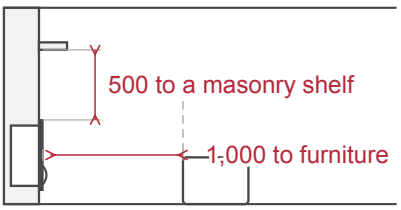

Wall at the left. Front at the right.

PLANNING NOTES

Keep 500 from curtains and fabric at the sides, and 100 to the floor, carpet included.
A masonry shelf that resists heat may sit 500 above the fireplace. Never place a TV or other electrical equipment above the fireplace.
We recommend 500 between the fireplace and any air vent.
A load-bearing lintel must support the wall above the opening.
Do not install it in a bedroom, bathroom, toilet or sauna.
We suggest a room of 466 m³ at most. Ask us for the smallest room size without permanent ventilation.
The gas inlet connection is Ø8. A gas installer registered for your gas type must install it.