

Chad-O-Chef 800 Double Sided Fireplace

Built-in flueless gas fireplace: one fire seen from two rooms, set in an opening through a wall


01 FRONT VIEW, BOTH FACES ALIKE

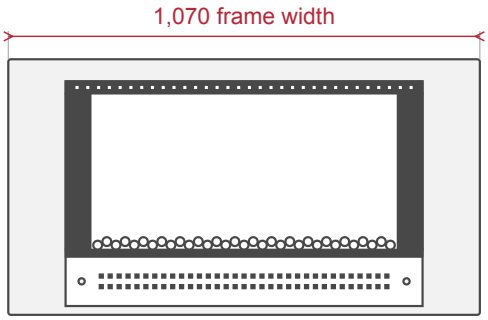

02 SIDE VIEW

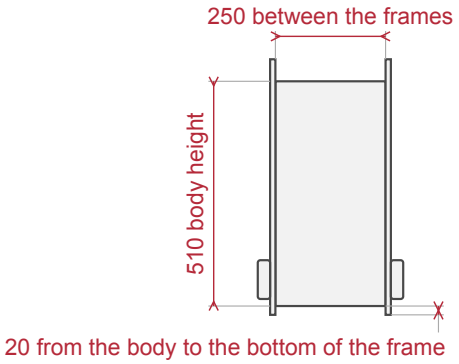


03 TOP VIEW

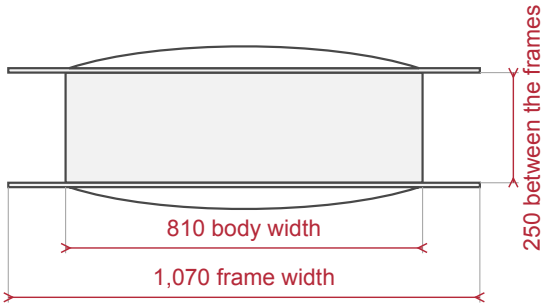


A fire face at the top and at the bottom, each with a curved cover.

04 WALL OPENING

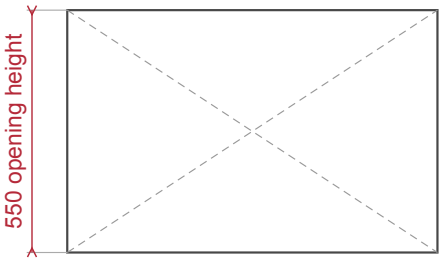


The opening is 840 wide: the body width plus 30.

05 CLEARANCES, FRONT (SMALLER SCALE)

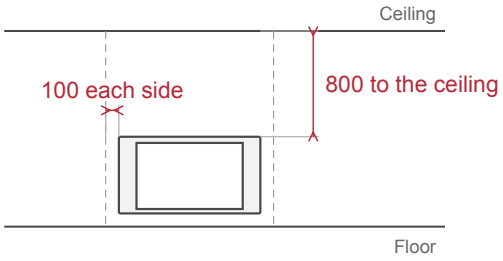

06 CLEARANCES, SIDE (SMALLER SCALE)

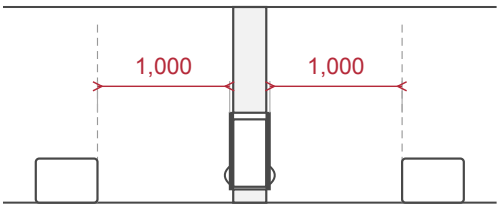

The wall in the middle. 1,000 to furniture.

PLANNING NOTES

Keep 500 from curtains and fabric at the sides.
Keep 100 to the floor, carpet included.
Without permanent ventilation the room must be at least 160 m³.
A smaller room needs permanent ventilation, planned by your gas installer.
We suggest a room of 399 m³ (108 m²) at most, subject to room conditions.
It fits a double-brick wall with about 10 mm of screed on each side.
Two supporting lintels must carry the wall above the opening.
A gas installer registered with SAQCC Gas for your gas type must install it.
Ask us for the frame height and the full depth with both curved covers before you build.