

Chad-O-Chef 1000 Double Sided Fireplace

Indoor flueless gas fireplace: one fire seen from two rooms, set in an opening through a wall


01 FRONT VIEW, BOTH FACES ALIKE

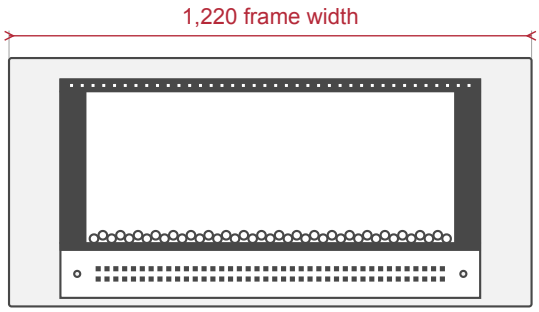

02 SIDE VIEW

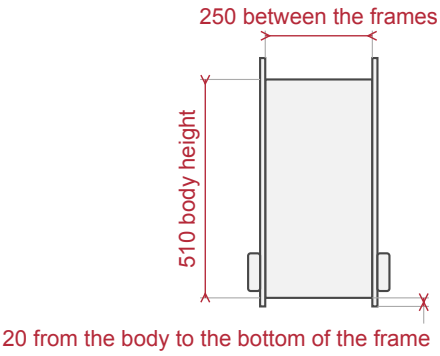


03 TOP VIEW

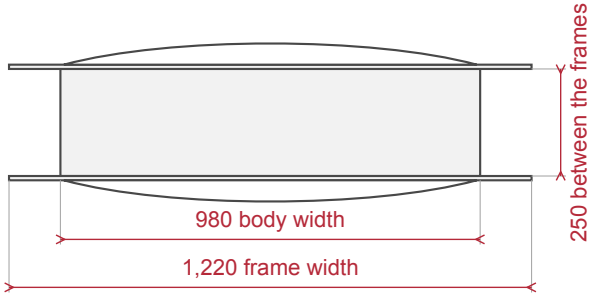


A fire face at the top and at the bottom, each with a curved cover.

04 WALL CUT-OUT

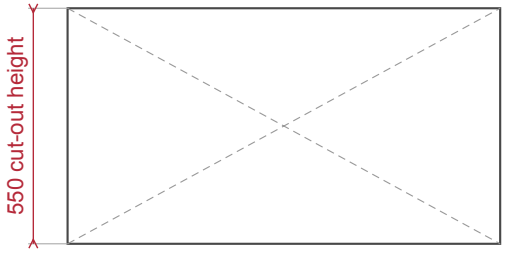


The cut-out is 1,010 wide: the body width plus 30.

05 CLEARANCES, FRONT (SMALLER SCALE)

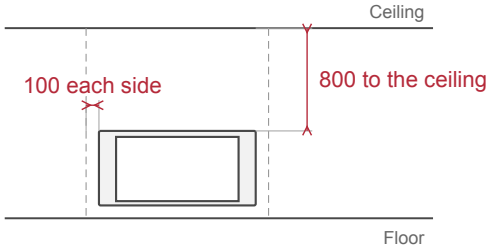

06 CLEARANCES, SIDE (SMALLER SCALE)

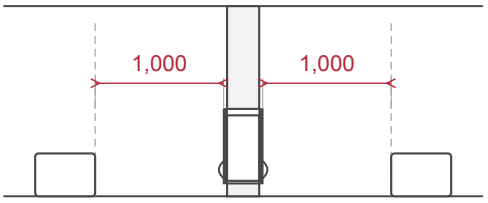

The wall in the middle. 1,000 to furniture.

PLANNING NOTES

Keep 500 from curtains and fabric at the sides.
Keep 100 to the floor, carpet included.
A heat-resistant masonry shelf may sit 500 above the fireplace.
Never put a TV or other electrical equipment above it.
We recommend keeping it 500 from an air vent.
We suggest a room of 416 m³ (131 m²) at most, subject to insulation, climate and room conditions.
A room below the minimum size needs permanent ventilation, designed by your installer. Ask us for that minimum size.
Do not install it in a bedroom, bathroom, toilet or sauna.
It fits an opening through a double brick wall. Two load-bearing lintels must carry the wall above it.
A registered gas installer for your gas type must install it and connect the gas at the 8 mm inlet.
Ask us for the frame height and the full depth with both curved covers before you build.