

Chad-O-Chef Flameline 810

Drop-in flueless gas fireplace: one burner between two glass walls

01 FRONT VIEW

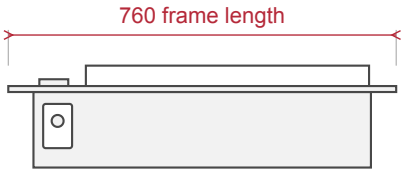


02 SIDE VIEW




Front at the right.

03 TOP VIEW

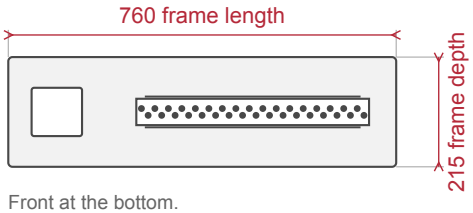


Front at the bottom.
Control cover at the left.

04 CUT-OUT IN THE HOUSING

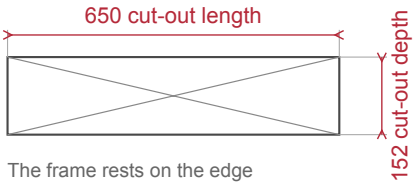


The frame rests on the edge
of the cut-out.

05 VENT COVER (TWO SUPPLIED)




Two vent covers are supplied.
The housing must not burn. It needs two brick-sized
ventilation openings below the unit; the covers finish them.

06 CLEARANCES, FRONT (SMALLER SCALE)

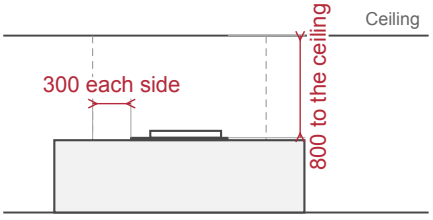

07 CLEARANCES, SIDE (SMALLER SCALE)

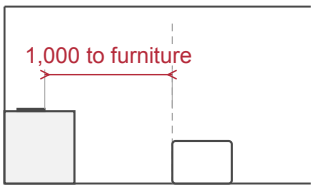

Non-combustible wall at the left.

PLANNING NOTES

Keep 500 from curtains and fabric at the sides.
Keep 100 to the floor, carpet included.
Keep 100 to a non-combustible wall behind.
Keep 100 at the sides to materials that do not burn and resist heat.
Models made from January 2022 can stand against a wall when these clearances are kept.
Without permanent ventilation the room must be at least 105 m³.
For a smaller room, your gas installer must design permanent ventilation.
Do not install it in a bedroom, bathroom, toilet or sauna.
A registered gas installer for your gas type must install it.