

Chad-O-Chef Flameline 1210

Drop-in flueless gas fireplace: two burners between four glass walls

01 FRONT VIEW

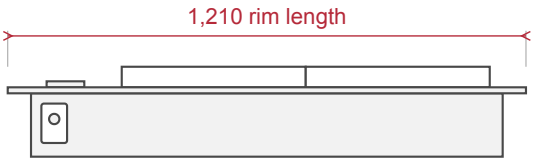


02 SIDE VIEW




Front at the right.

03 TOP VIEW

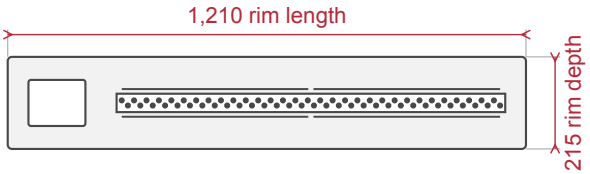


Front at the bottom. Control cover at the left.
Two burners and four glass walls.

04 CUT-OUT IN THE HOUSING

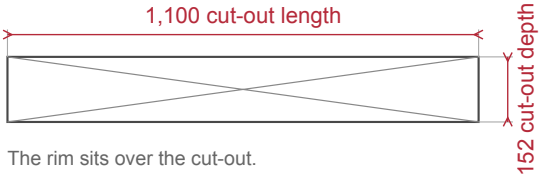


The rim sits over the cut-out.

05 VENT COVER (TWO SUPPLIED)




The housing must not burn. It needs two brick-sized ventilation openings below the unit. The two vent covers finish them.

06 CLEARANCES, FRONT (SMALLER SCALE)

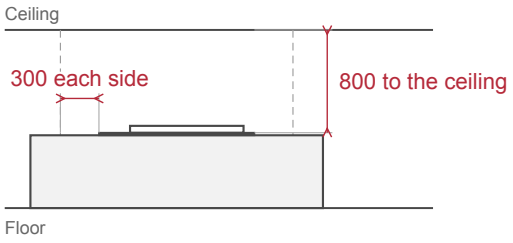

07 CLEARANCES, SIDE (SMALLER SCALE)

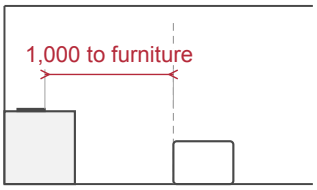

Wall at the left. Front at the right.

PLANNING NOTES

Keep 500 from curtains and fabric at the sides.
Keep 100 to the floor, carpet included.
A wall that does not burn and resists heat may come to 100 behind it.
Materials that do not burn and resist heat may come to 100 at its sides.
Without permanent ventilation the room must be at least 220 m³.
A smaller room needs permanent ventilation. Your gas installer calculates it.
We suggest a room of 489 m³ (147 m²) at most. The right size depends on insulation, materials and climate.
Do not install it in a bedroom, bathroom, toilet or sauna.
A SAQCC Gas registered installer for your gas type must install it.
Ask us for the body length, the height with the glass walls and the clearance to a masonry shelf.