
ALL SIZES IN MILLIMETRES


FLAMM B4 Double Sided on Rotatable Pedestal

Freestanding wood fireplace: closed combustion, with glass on both sides

01 FRONT VIEW

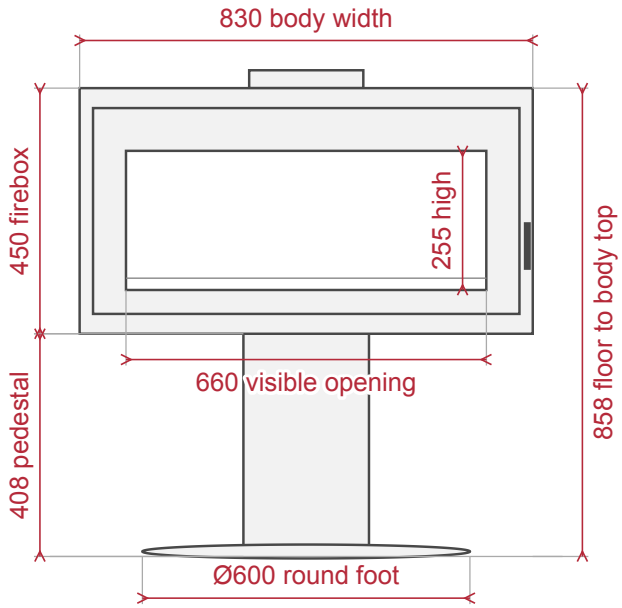


02 SIDE VIEW

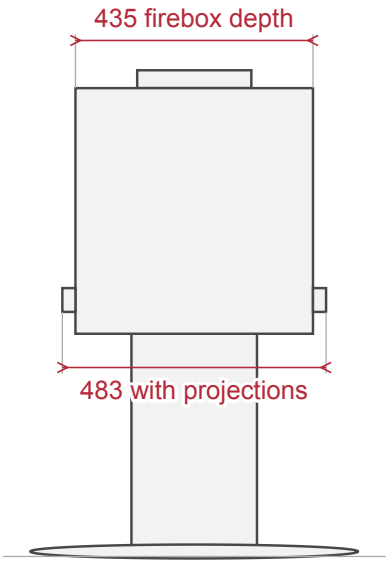


Glass door at the left and at the right.

03 TOP VIEW

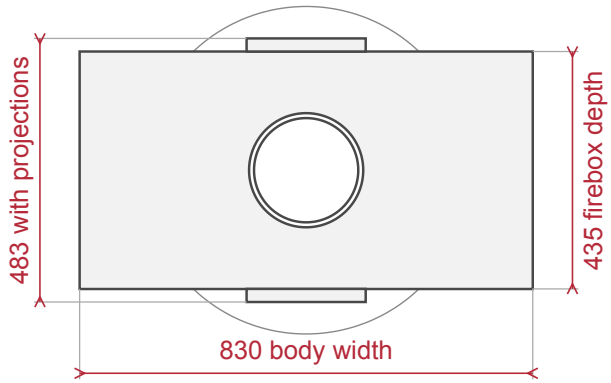


Thin line: the round foot. Flue outlet on top.

04 FLUE OUTLET (LARGER SCALE)

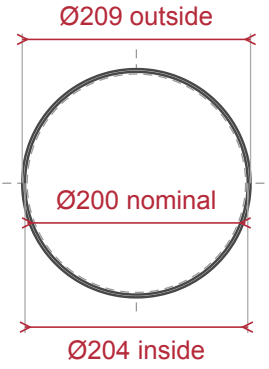


For a nominal Ø200 flue pipe.

05 GLASS SHEET

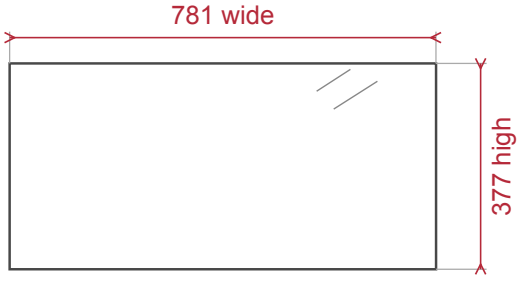

The visible opening is smaller than the glass.

06 SIDE FIREBRICK




BRAAI CULTURE


ALL SIZES IN MILLIMETRES

FLAMM B4 Double Sided on Rotatable Pedestal


07 COMBUSTIBLES, FRONT VIEW (SMALLER SCALE)

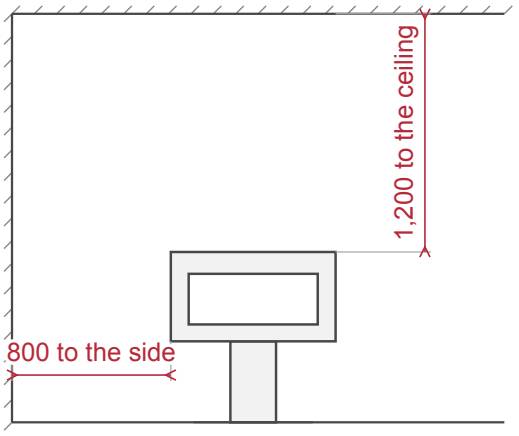

08 FURNISHINGS, TOP VIEW (SMALLER SCALE)

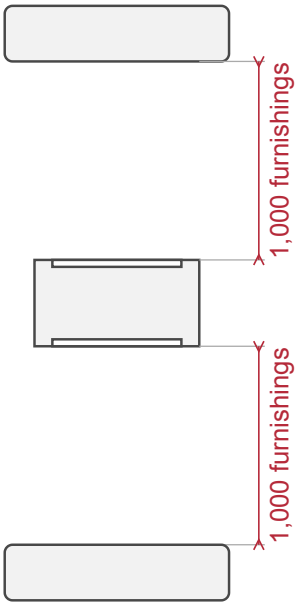

09 FLOOR PROTECTOR, TOP VIEW (SMALLER SCALE)

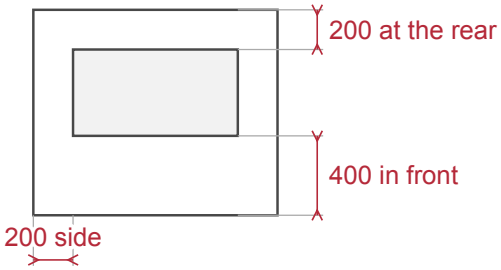

Front (loading side) at the bottom. Plan the second glass side too.

PLANNING NOTES

These are product sizes. Have an independent installer check the unit, the hearth and the safe clearances on site.
The 858 ends at the top of the body. The flue collar stands above it.
Keep 800 to combustible materials, 1,200 to a combustible ceiling and 1,000 to household furnishings.
Keep household furnishings 1,000 away on every side the fire faces.
A flue of about 4,500 could be satisfactory. Your installer decides the route for your building.
The flue connects at the top. Ask us how the pedestal turns with a fixed flue before you plan around it.
The hearth, the firewall, the recess gaps and the flue route are in the instruction manual on this page.
Flue pipes, accessories and installation are not included. Send us a photo and measurements for a flue quote.