
ALL SIZES IN MILLIMETRES


Chad-O-Chef 700 Double-Sided Universal Grate

Flueless gas grate for an existing double-sided wood-burning fireplace

01 FRONT VIEW, BOTH LONG FACES ALIKE

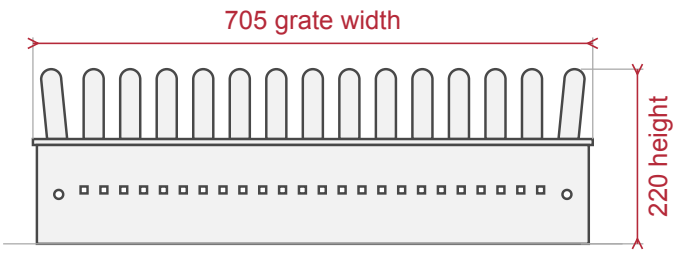


02 SIDE VIEW

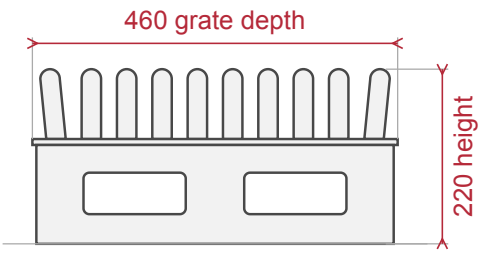


A fire face at the left and at the right.

03 TOP VIEW

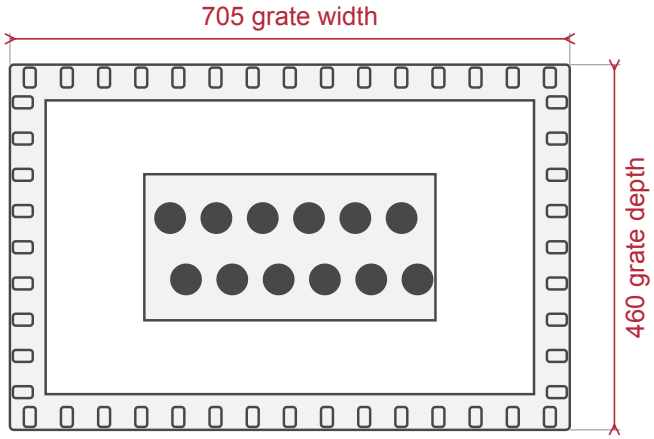

A fire face at the top and at the bottom. Coals on the burner.

04 CLEARANCES, SIDE VIEW (SMALLER SCALE)

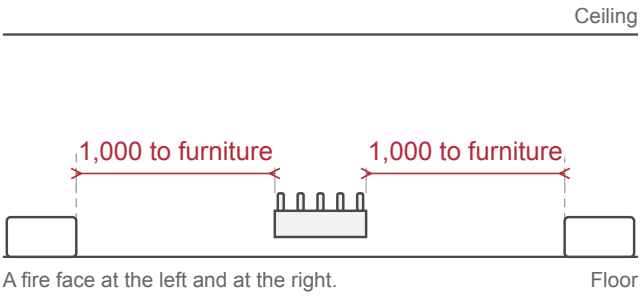


BRAAI CULTURE

ALL SIZES IN MILLIMETRES

Chad-O-Chef 700 Double-Sided Universal Grate

05 CLEARANCES, FRONT VIEW (SMALLER SCALE)

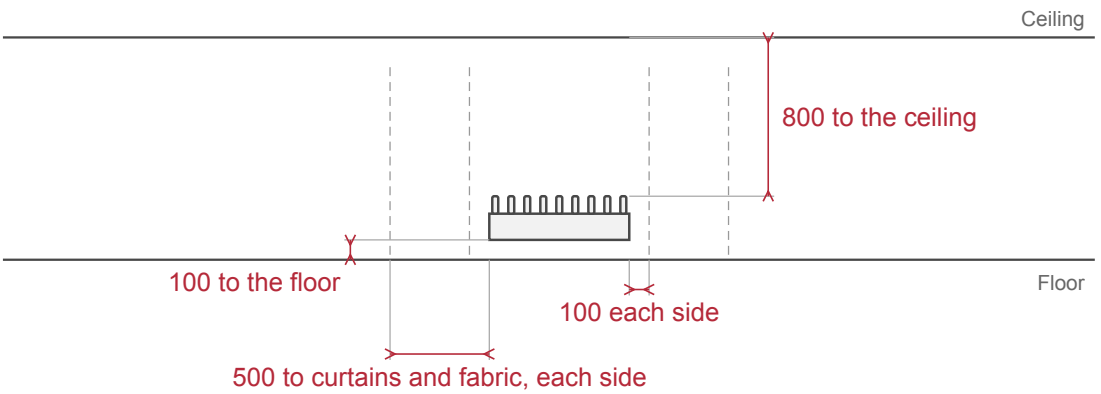

PLANNING NOTES

These are the grate's own sizes. The firebox is not included.
It fits a traditional double-sided wood-burning fireplace. The existing chimney must be closed off.
Have your gas installer check your fireplace before fitting.
The clearances are to combustible materials. The floor clearance includes carpet.
A heat-resistant masonry shelf may sit 500 above the fireplace.
In the box: the grate, the burner, the decorative stones and the instruction manual.
It runs on LPG or natural gas, set up for your gas type.
It lights with a piezo spark.
The maximum gas input is 10.7 kW. This is not the heat output.
A pilot oxygen depletion safety system works at a minimum of 18.5% oxygen.
Without permanent ventilation the room must be at least 198 m³.
A room under 198 m³ needs permanent ventilation, calculated by your gas installer.
We suggest a room of 438 m³ (132 m²) at most, subject to insulation, materials and climate.
Do not install it in a bedroom, bathroom, toilet or sauna.
A gas installer registered with SAQCC Gas for your gas type must install it.